

LDV series


LED Power Supply

Miniature LED Power Supplies

LDV Series

FEATURES

- **Universal Input: 90-264VAC**
- **Constant Output Voltage**
- **High Efficiency 91%**
- **IP67 rated**
- **Class 2 device (UL1310)**
- **Power Factor: Typical 0.95**
- **OCP, OVP, SCP, OTP**

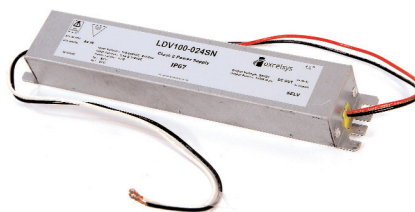

LED Power
100W

The LDV series can deliver up to 92W of output power in the smallest package size in the industry. These waterproof IP67, Class 2 LED drivers offer industry leading efficiencies of over 90% in the lowest profile (28mm) package.

These ultra compact LED power supplies are ideal for space critical applications including commercial refrigeration, retail and office lighting as well as harsh outdoor and urban lighting applications such as street lighting, emergency lighting, signs and displays.

For more information contact sales@excelsys.com or visit www.excelsys.com

Model Number	Output Voltage	Output Current (max)	Efficiency
LDV075-024SN	24V	3.125A	90.0%
LDV100-024SN	24V	3.830A	91.0%

Input Specifications					
Parameter	Conditions/Description	Min	Nom	Max	Units
Input Voltage Range	Universal Input	90		264	VAC
Input Frequency Range		47		63	Hz
Input Current	240VAC, 92W 240VAC, 75W			0.45 0.4	A A
Inrush Current	240VAC in, 25°C, Cold Start			40	A
Power Factor	240VAC, 110VAC	0.9		0.98	
Output Specifications					
Parameter	Conditions/Description	Min	Nom	Max	Units
Line Regulation				±0.5	%
Load Regulation				±1.5	%
Voltage Accuracy	% of Vout			±2.0	%
Ripple and Noise	20MHz Bandwidth. See Note 1			2.5	% pk-pk
Turn-on Delay	Measured at 220VAC and full load			0.5	s
Hold Up Time		15	20		ms
Over Current Protection	LDV100-024SN LDV075-024SN	3.830 3.125		4.17 3.75	A A
Overload Protection	LDV100-024SN See Note 2 LDV075-024SN	92 75		100 90	W W
Short Circuit Protection	Auto Recovery				
Over Voltage Protection	Auto Recovery			34	V
Over Temp Protection	Auto Recovery	90	100	110	°C
General Specifications					
Parameter	Conditions/Description	Min	Nom	Max	Units
Isolation Voltage	Input to Output See Note 3 Input to Chassis	3750 3750			VAC VAC
Safety Agency Approvals	UL8750, UL1310, CSA C22.2 No.223, EN61347-2-13, EN61347-1				
No load Power Dissipation	Measured at 100VAC and 240VAC			1.5	W
MTBF	Telecordia SR-33, Full Load, 25°C		1,000,000		Hours
Lifetime	T case = 60°C		100,000		Hours
Weight			0.66		Kg
Operating Temperature	Maximum T case = 80°C	-30		+50	°C
Storage Temperature		-40		+85	°C
Relative Humidity	Non-condensing (operating)	5		95	%RH
Altitude	Operating, Non Operating 10,000m			2000	m
Vibration	5-500Hz, random vibration			1.0	Grms
Shock	Half-Sine, 11ms duration			10	Grms

Note 1. Output connected in parallel with 0.1uF ceramic capacitor and 10uF electrolytic capacitor.

Note 2. LDV100-024SN is guaranteed to provide 92W output power at nominal output voltage. Output power will not exceed 100W under normal operating conditions, ensuring UL1310 Class 2 compliance under all conditions.

Note 3. Isolation test may not be carried out on unit. Contact Applications Support for details

Note 4. Maximum allowable case temperature is 80°C



Europe/Asia

Excelsys Technologies Ltd
27 Eastgate Drive
Eastgate Business Park
Little Island, Cork, Ireland
IRELAND

t: +353 21 4354716
f: +353 21 4354864
e: sales@excelsys.com

North America

Excelsys Technologies
519 Interstate 30, #309
Rockwall, TX 75087
USA

t: (972) 771 4544
f: (972) 421 1805
e: salesusa@excelsys.com

EMC			
Parameter	Standard Tested To	Level	Units
Emissions			
Conducted	EN55015, EN55022 Class B	Compliant	
Radiated	EN55015, EN55022 Class B	Compliant	
Harmonic Distortion	EN61000-3-2, Class C	Compliant	
Flicker and Fluctuation	EN61000-3-3	Compliant	
Immunity			
ESD	EN61000-4-2	Level 2	
Radiated RFI	EN61000-4-3	Level 3	
Fast Transients - burst	EN61000-4-4	Level 3	
Input Line Surges	EN61000-4-5	Level 3	
Conducted RFI	EN61000-4-6	Level 3	
Power Freq Magnetic Field	EN61000-4-8	Compliant	
Voltage Dips	EN61000-4-11	Criterion B	


INPUT / OUTPUT WIRING

INPUT CABLE

Black (L) and White(N) 300±20mm
18AWG

OUTPUT CABLE

Red (+V) and Black (-V) 300±20mm
18AWG

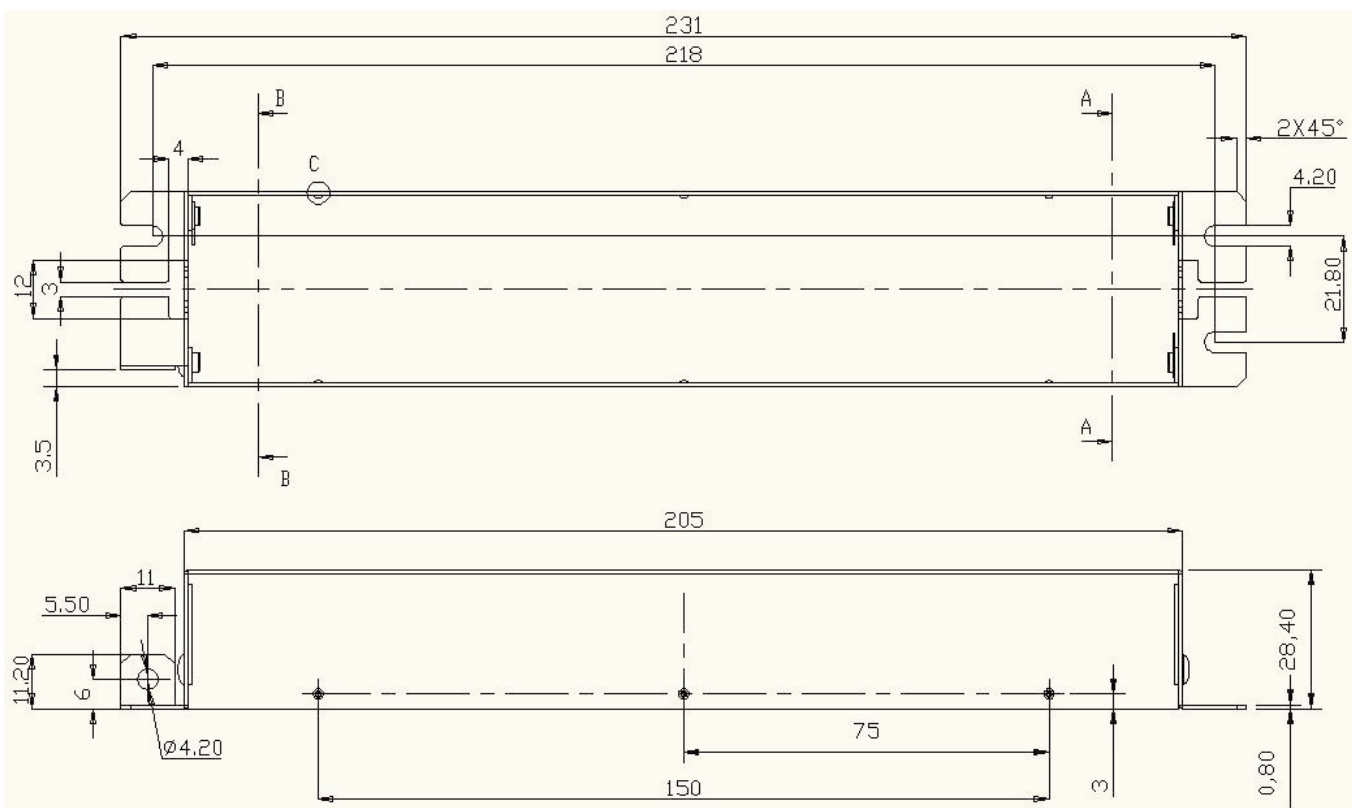

Europe/Asia

Excelsys Technologies Ltd t: +353 21 4354716
27 Eastgate Drive f: +353 21 4354864
Eastgate Business Park e: sales@excelsys.com
Little Island, Cork, Ireland
IRELAND

North America

Excelsys Technologies t: (972) 771 4544
519 Interstate 30, #309 f: (972) 421 1805
Rockwall, TX 75087 e: salesusa@excelsys.com
USA